


Project: Clongriffen- rail

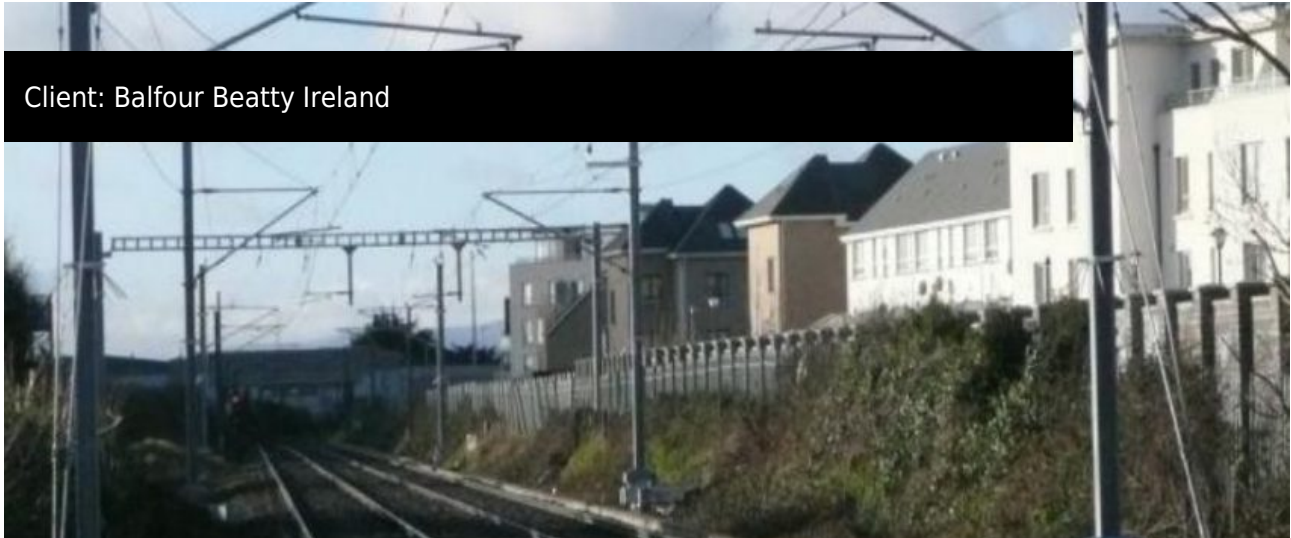

Our brief was to design, supply and install 14 OHLE foundations and the 4 Anchors.

The helical piles were designed specifically for the soils encountered at this location.

The grillages were designed specifically for the OHLE structure and allowed installation close to existing troughing routes and services

The installation had to be completed within 3 night shifts during 1 weekend.

14 grillages and a total of 60 helical piles to a depth of 6m were installed during the 3 night shifts